



$U_w: 0,89$
 W/m^2K

$U_f: 1,1$
 W/m^2K

ADO

**PENWOOD 750 SERIES
PVC PROFILE SYSTEM**

PENWOOD 750 SERIES PVC PROFILE SYSTEM

TECHNICAL

Penwood 750 SERIES

Profile Width: 70 mm

Number of chambers: 5 chambers system

Profile Class: B Class (TS EN 12608-1)

Seal Type: External / Internal double seal system

Seal Type and Color: TPE - Grey /Black

Glass Thickness (mm): 4, 20, 24, 28, 32, 40, 42 mm

The thermal insulation Uf: 1,1W/m²K

Uw: 0,89 W/m²K


INSTRUCTION

- 70 mm profile system. Because of the composite profile extruded together, no need for extra metal reinforcement inside.
- No need for reinforcement cutting screwing unit and workman.
- Compared with metal reinforcement system profile, it has %30 more advantages with max heat - sound and water insulation.
- Just cut and weld. You do not need Metal Reinforcement and extra stock area for Metal Reinforcement.
- Possibility to install single 4-6 mm or double glazing 20, 24, 28, 32, 40, 42 mm with different thickness of glazing bead.
- It has water drainage channel, it can be directly drilled after cutting.
- Color range for laminated products.
- It is quality is accredited by national and international certificates.



- 1 Frame 5 chambers system.
- 2 Offset and flat sash option
- 3 Double and triple glass option.
- 4 No need metal reinforcement.

INSTALLATION

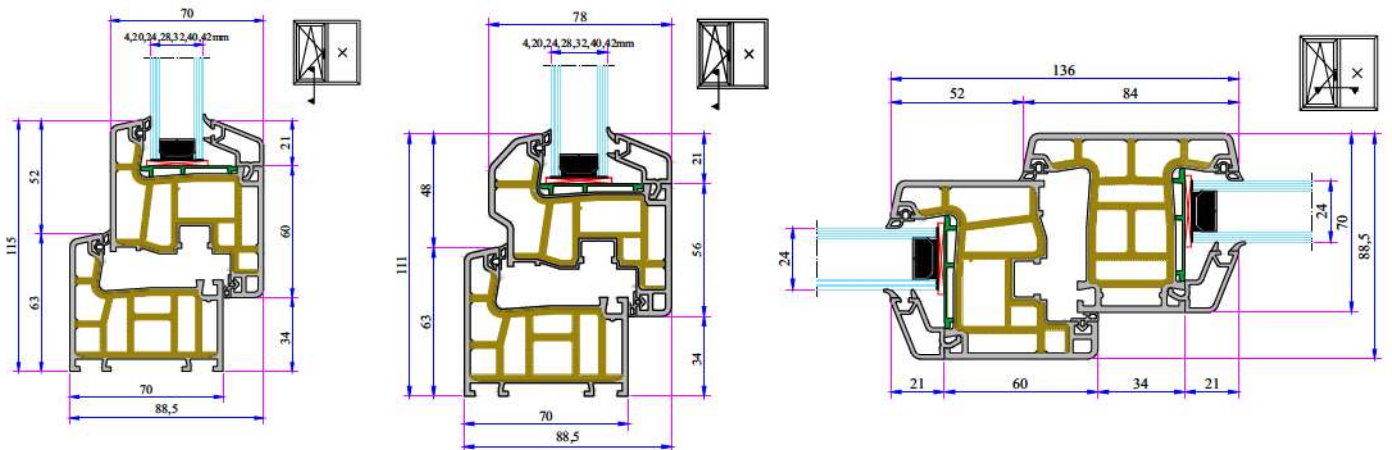

COLOR OPTIONS



FACTORY

Antalya Organize Sanayi Bölgesi 2. Kısım Mah. 21. Cadde No:3 07040 Döşemealtı /ANTALYA / TURKEY
Tel: +90 242 236 20 00 · Faks: +90 242 236 20 90 · E-mail: info@ado.com.tr · W: www.ado.com.tr