



**U<sub>w</sub>: 0,77**  
W/m<sup>2</sup>K

**U<sub>f</sub>: 0,90**  
W/m<sup>2</sup>K

**ADO**

**PENWOOD 883 MD & AD SERIES  
PVC PROFILE SYSTEM**

# PENWOOD 883 MD & AD SERIES PVC PROFILE SYSTEM

## TECHNICAL

### PENWOOD 883 MD & AD SERIES

**Profile Width:** 80 mm

**Number of chambers:** 6 chambers system

**Profile Class:** B Class (TS EN 12608-1)

**Seal Type:** Triple seal system (External / Internal / Middle)

**Seal Type and Color:** TPE - Grey /Black


**Glass Thickness (mm):** 22, 24, 32-34, 42, 44, 48-50 mm

**The thermal insulation Uf:** 0,90W/m<sup>2</sup>K

**Uw:** 0,77 W/m<sup>2</sup>K


## INSTRUCTION

- 80 mm profile system. Because of the composite profile extruded together, No need for extra metal reinforcement inside.
- No need for reinforcement cutting screwing unit and workman.
- Compared with metal reinforcement system profile, it has %30 more advantages with max heat-sound and water insulation.
- Just cut and weld. You do not need Metal Reinforcement and extra stock area for Metal Reinforcement.
- Possibility to install single 4-6 mm or double glazing 22, 24, 32 - 34, 42, 44, 48 - 50 mm with different thickness of glazing bead.
- It has water drainage channel, it can be directly drilled after cutting.
- Color range for laminated products.
- It's quality is accredited by national and international certificates.

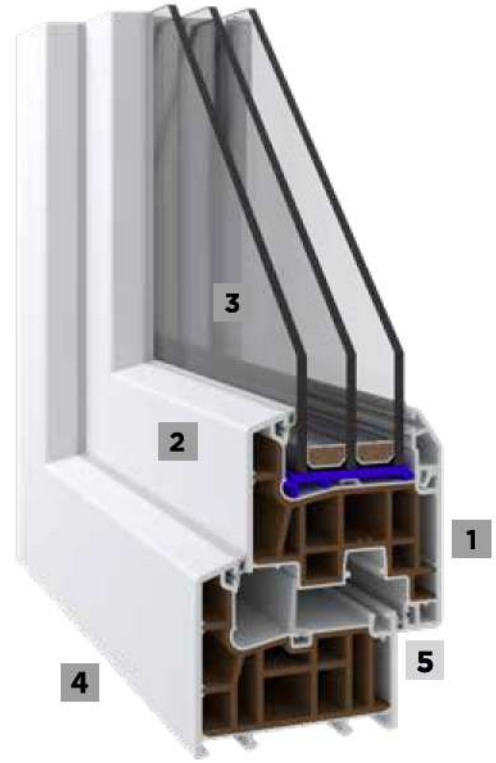

- 1 Frame 6 chambers system.
- 2 Offset and flat sash option
- 3 Double and triple glass option.
- 4 No need metal reinforcement.
- 5 System with central gasket.

## INSTALLATION

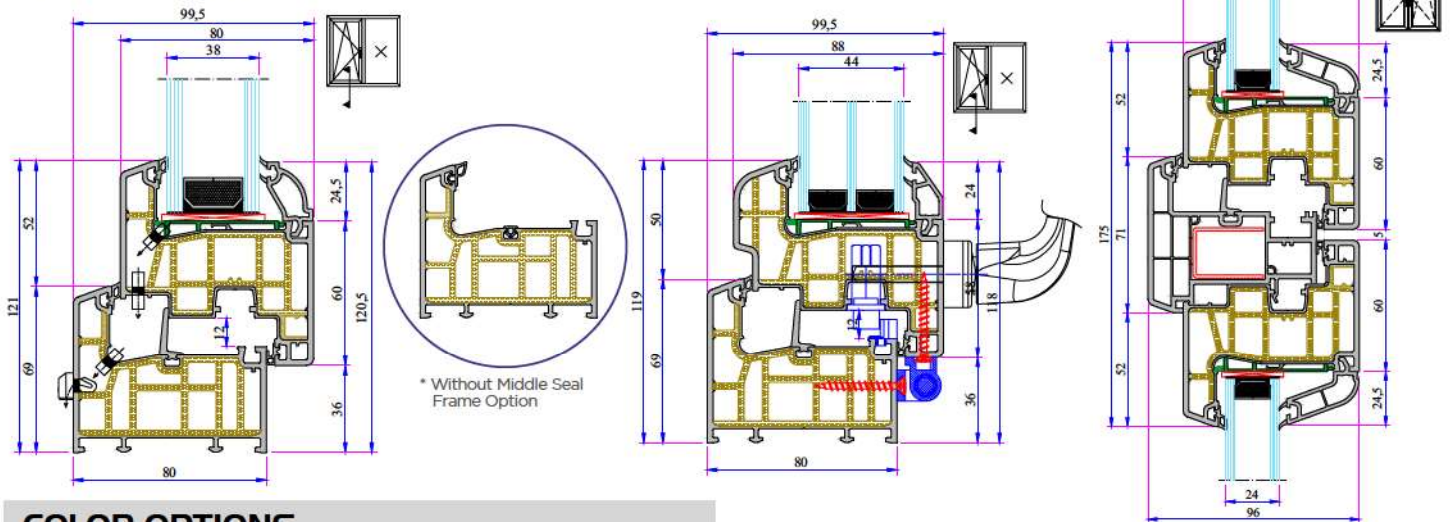

## COLOR OPTIONS



## FACTORY

Antalya Organize Sanayi Bölgesi 2. Kısım Mah. 21. Cadde No:3 07040 Döşemealtı /ANTALYA / TURKEY  
Tel: +90 242 236 20 00 · Faks: +90 242 236 20 90 · E-mail: info@ado.com.tr · W: www.ado.com.tr