

# **TECHNICAL**

#### **WO 60 SERIES (101 SERIES)**

Profile Width: 60 mm Number of chambers: 3


Profile Class: B Class (TS EN 12608-1)

Seal Type: External / Internal double seal system

Seal Type and Color: TPE - Grey /Black Glass Thickness (mm): 4, 20, 24, 30, 32 mm The thermal insulation Uf: 1,56 W/m<sup>2</sup>K


### INSTRUCTION

- · The main profile has 60 mm width.
- · Because of the elastic grey and black seal which does not leave any stain on profiles will be provided maximum air, water, dust and sound isolation.
- $\cdot$  Due to the 3 chambers profiles, it has maximum performance for thermal, sound and water isolation.
- · It is a series of profiles with very special design that provides maximum wind resistance on high rise buildings.
- · Excluding normal sash profile there is also chance to have a choice for offset type sash profile.
- · In addition to white profile a different laminated color range is available.
- $\cdot$  4-5 mm single glazing application of 20, 24, 30, 32 mm glazing beads give us alternatives of using double, triple glazing and panels.

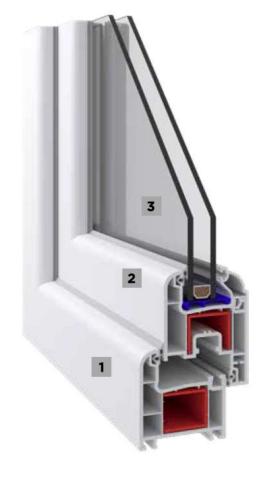

- 1 Frame 3 chambers system.
- 2 Offset and flat sash option
- 3 Double and triple glass option.

# INSTALLATION

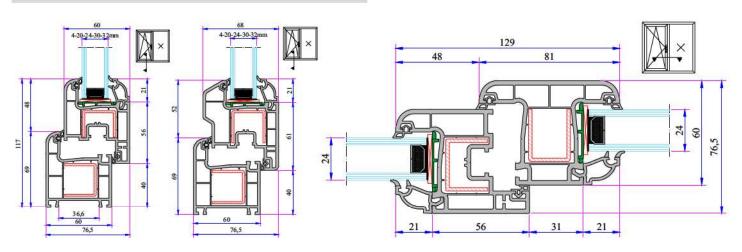

# **COLOR OPTIONS**

