

## TECHNICAL

#### W FR 60 SERIES

Profile Width: 60 mm
Number of chambers: 3

Profile Class: B Class (TS EN 12608-1)

Seal Type: External / Internal double seal system

Seal Type and Color: TPE - Grey /Black Glass Thickness (mm): 24, 28, 30, 32 mm

# W FR 70 SERIES Profile Width: 70 mm


Number of chambers: 5
Profile Class: B Class (TS EN 12608-1)

Seal Type: External / Internal double seal system

Seal Type and Color: TPE - Grey /Black Glass Thickness (mm): 24, 28, 30, 32 mm


#### INSTRUCTION


- · The profiles have 60 mm width.
- Because of the elastic grey and black seal which does not leave any stain on profiles will be provided maximum air, water, dust and sound isolation.
- Due to the 3 chambers profiles, it has maximum performance for thermal, sound and water isolation.
- · It is a series of profiles with very special design that provides maximum wind resistance on high rise buildings.
- Excluding normal sash profile there is also chance to have a choice for offset type sash profile.
- · In addition to white profile a different laminated color range is available.

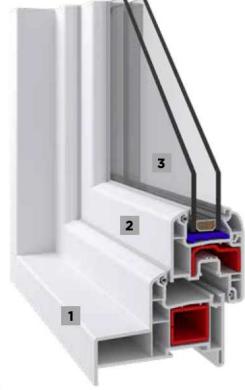

- 1 Frame 3 chambers system.
- 2 Offset and flat sash option
- 3 Double and triple glass option.
- Application of 24, 28, 30, 32 mm glazing beads give us alternatives of using double, triple glazing and panels.
- · It provides the visual integrity in the inner surface and the frame-wall connections due to integrated frame with sill profile.

### INSTALLATION

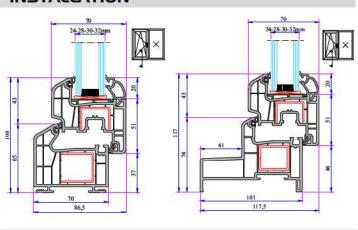

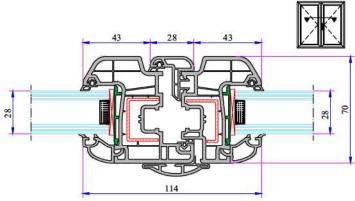

# **COLOR OPTIONS**

