

TECHNICAL

W 232 DOUBLE AND SINGLE RAIL SLIDING SERIES

Profile Width: 75 mm double rail frame.

92,5 mm single rail frame and 50 mm sliding system sash profile.

Number of chambers: 3 chambers system
Profile Class: B Class (TS EN 12608-1)
Seal Type: The insulated bristle wick system
Seal Type and Color: TPE - Grey /Black
Glass Thickness (mm): 4 - 6, 20, 24 mm

INSTRUCTION

- 75 mm profile width with double railed frame and 92,5 mm width single rail alternative frame and 50 mm width of sash profile.
- Perfect thermal, sound and water isolation because of the 3 chambers system.
- · The medium locked sash with a seal system.
- · Application of single glaze 4-6 mm and insulating glass 20, 24 mm by grey sealed glazing beads in different thickness.
- · Application with roller shutter and without roller shutter choices.
- · Wooden designed laminated applications.




1 Frame with fly-screen and sill option

56,5

20 20

2 Triple rail sash option



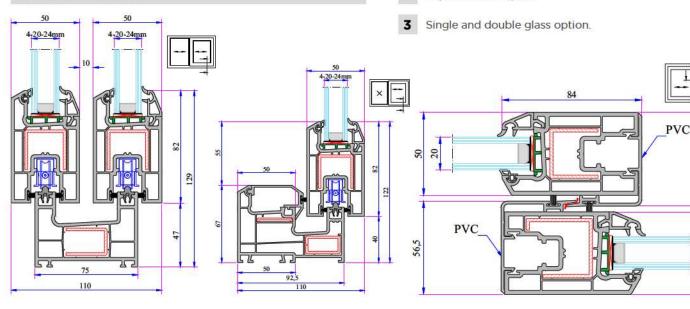

COLOR OPTIONS

