

TECHNICAL

W 634 SERIES

Profile Width: 60 mm Number of chambers: 4 Profile Class: C Class

Seal Type: External / Internal double seal system

Seal Type and Color: TPE - Grey /Black Glass Thickness (mm): 4, 20, 24, 30, 32 mm The thermal insulation Uf: 1,50 W/m²K


INSTRUCTION


INSTALLATION


- · The main profiles have 60 mm width.
- · Because of the elastic grey and black seal which does not leave any stain on profiles will be provided maximum air, water, dust and sound isolation.
- Due to the 4 chambers profiles, it has maximum performance for thermal, sound and water isolation.
- · Excluding normal sash profile there is also chance to have a choice for offset type sash profile.
- · In addition to white profile a different laminated color range is available.
- \cdot 4-6 mm single glazing application of 20, 24, 30, 32 mm glazing beads give us alternatives of using double, triple glazing and panels.



- 1 Frame 4 chambers system.
- 2 Offset and flat sash option
- 3 Double and triple glass option.



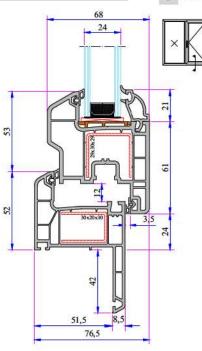

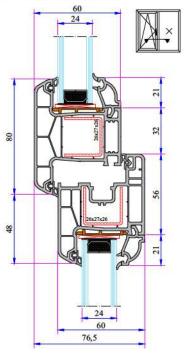

COLOR OPTIONS

